




Series 536 PLCC Test & Burn-in Zero Insertion Force Sockets (cont.)


- All footprints shown are top view (component side), with latch side on left, hinge side on right.
- Footprint tolerances:
 Row-to-row: $\pm .003 [\pm .08]$
 Pin-to-pin: $\pm .003 [\pm .08]$ non-cumulative.
- Suggested pin mounting holes:
 $.032 \pm .002 [81 \pm .05]$ diameter.
- Suggested socket mounting holes: $.125 [3.18]$ dia.

See Data Sheet No. 10006 for additional information.


28 PIN

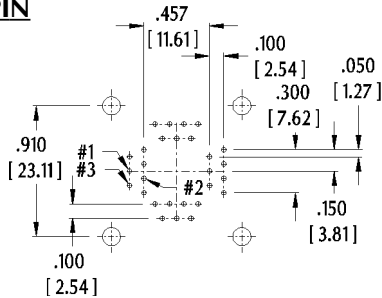


44 PIN

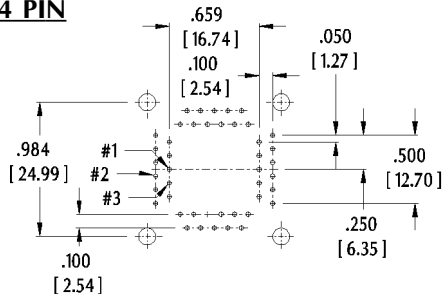


68 PIN

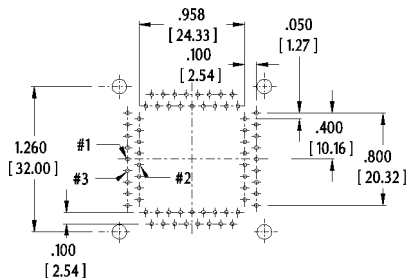


20 PIN

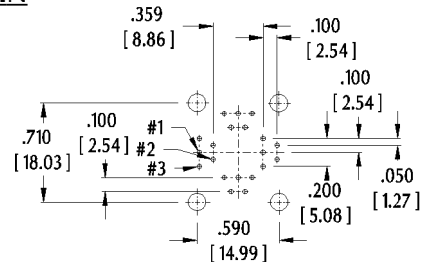


32 PIN

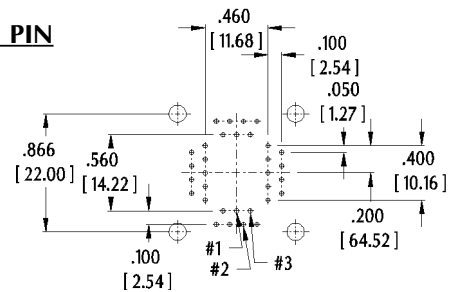

52 PIN

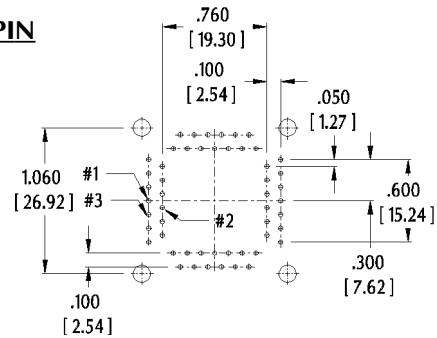

84 PIN

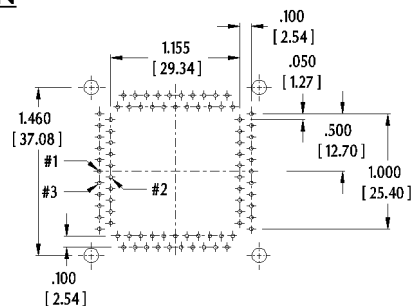

ARIES
ELECTRONICS, INC.

<http://www.arieselec.com> • info@arieselec.com

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891

UK/SCANDINAVIA/IRELAND
Milton Keynes, GB
TEL: +44 1908 260007
FAX: +44 1908 260008

EUROPE (MAINLAND)
Papendrecht, Holland
TEL: +31 78 615 94 65
FAX: +31 78 615 43 11

10007
REV.A