

# POWER RELAY

## 1 POLE—1, 3, 5, 10 A (CADMIUM FREE CONTACTS TYPE)

### LZG SERIES

#### ■ FEATURES

- UL (UL372, UL508, UL873), CSA, VDE
- 4 kinds of contact ratings
  - Low level to 10 amps switching
- Standard and high sensitivity types available
- High isolation in small package
  - Dielectric strength: 2,500 VAC (between coil and contacts)
  - Surge strength: 7,000 V
- UL class B (130°C) insulation type available (only plastic sealed type)
- Plastic sealed backfilled with nitrogen
- Printed circuit terminals compatible with LZ relay
- Environmentally friendly cadmium free contact type is available.



#### ■ ORDERING INFORMATION

[Example]     LZG - B 12 H M S E - K  
                   (a)  (b) (c) (d) (e) (f) (g)  (h)

(a)	Series Name	LZG: LZG Series
(b)	Coil Heat Proof Class	Nil : Standard type B : UL Class B insulation type (130°C)
(c)	Nominal Voltage	Refer to the COIL DATA CHART
(d)	Contact Rating	Nil : 3 A H : 5 A V : 10 A (only LZG-M) W : 1 A (bifurcated)
(e)	Contact Arrangement	Nil : 1 form C (SPDT) M : 1 form A (SPST-NO)
(f)	Coil Type	Nil : Standard type S : High sensitivity type (without LZG-V)
(g)	Contact Material (Rating)	Nil : Gold overlay silver-palladium (only LZG-W) Nil : Gold overlay silver-nickel (3 A, 5 A) Nil : Silver alloy (10 A) (only LZG-VM) E : Silver-nickel (3 A, 5 A)
(h)	Enclosure	Nil : Flux free type K : Plastic sealed type (only LZG-B) C : Plastic sealed type (with tape) (only LZG-B)

## ■ SAFETY STANDARD AND FILE NUMBERS

UL372, 508, 873 (File No. E56140)

C22.2 No. 0, No. 14 (File No. LR35579)

SEV-1025

Please note that UL/CSA/VDE ratings may differ from the standard ratings. Only "NIL" and "H" contacts have VDE approval.

Please request when the approval markings are required on the cover and/or relay recognized by SEV is required.

Type	Nominal voltage	Contact rating
LZG- ( ) LZG- ( )S	1.5 to 48 VDC 1.5 to 24 VDC	1/10 HP 120 VAC/240 VAC 2.5 A 240 VAC resistive 3 A 30 VDC/120 VAC resistive Pilot duty D 150
LZG- ( )H LZG- ( )HS	1.5 to 48 VDC 1.5 to 24 VDC	1/8 HP 120 VAC/240 VAC 4 A 240 VAC resistive 5 A 30 VDC/120 VAC resistive 1 A 250VAC inductive Pilot duty C 150
LZG- ( )VM	1.5 to 48 VDC	1/4 HP 120 VAC/240 VAC 7 A 240 VAC resistive 10 A 24 VDC/120 VAC resistive Pilot duty C 150

# LZG SERIES

## ■ SPECIFICATIONS

Item		10 A Type	5 A Type	3 A Type	1 A Type
		LZG-( )VM	LZG-( )H, LZG-( )HE	LZG( ), LZG-( )E	LZG-( )W
Contact	Arrangement	1 form A (SPST-NO)	1 form A (SPST-NO) or 1 form C (SPDT)		
	Material	Silver alloy	Gold overlay silver alloy		Gold overlay silver-palladium
	Style	Single			Bifurcated
	Resistance (initial) (at 1 A 6 VDC)	Maximum 70 mΩ (LZG-H) Maximum 100 mΩ (LZG-VM, HE, E)			Maximum 50 mΩ
	Rating (resistive)	10 A 120 VAC/24 VDC 1/4 HP 120 VAC	5 A 120 VAC/24 VDC 1/8 HP 120 VAC	3 A 120 VAC/30 VDC 1/10 HP 120 VAC	1 A 120 VAC/30 VDC
	Maximum Carrying Current	10 A	5 A		1 A
	Maximum Switching Power	1,680 VA, 240 W	960 VA, 120 W	600 VA, 90 W	190 VA, 30 W
	Maximum Switching Voltage	250 VAC, 150 VDC			
	Maximum Switching Current	10 A	5 A	3 A	1 A
	Minimum Switching Load*1	10 mA 5 VDC (LZG-H) 100 mA 5 VDC (LZG-VM, HE, E)			0.1 mA 100 VDC
Coil	Nominal Power (at 20°C)	Standard type: 0.45 to 0.6 W High sensitivity type: 0.33 W			
	Operate Power (at 20°C)	Standard type: 0.17 to 0.22 W High sensitivity type: 0.14 W			
	Operating Temperature	Standard type: -30°C to +70°C (no frost) High sensitivity type: -30°C to +80°C (no frost) (refer to the CHARACTERISTIC DATA)			
Time Value	Operate (at nominal voltage)	Maximum 7 ms			
	Release (at nominal voltage)	Maximum 4 ms			
Insulation	Resistance (at 500 VDC)		Minimum 250 MΩ		
	Dielectric Strength	between open contacts	750 VAC 1 minute		
		between coil and contacts	2,500 VAC 1 minute		
	Surge Strength		7,000 V (at 1.2 × 50 μs)		
Life	Mechanical		2 × 10 <sup>7</sup> operations minimum		
	Electrical		1 × 10 <sup>5</sup> operations minimum (rated load)		
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 3.3 mm)		
		Endurance	10 to 55 Hz (double amplitude of 3.3 mm)		
	Shock Resistance	Misoperation	100 m/s <sup>2</sup> (11 ±1 ms)		
		Endurance	1,000 m/s <sup>2</sup> (6 ±1 ms)		
	Weight		Approximately 9.2 g		

\*1 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

# LZG SERIES

## COIL DATA CHART

	MODEL				Nominal voltage	Coil resistance (±10%)	Must operate voltage	Must release voltage	Nominal power
	Single			Bifurcated					
	10 A Type	5 A Type	3 A Type	1 A Type					
Standard Type	LZG-(B) 1.5 VM	LZG-(B) 1.5H (M) (E)	LZG-(B) 1.5 (M) (E)	LZG-(B) 1.5 W (M)	1.5 VDC	5 Ω	0.97 VDC	0.08 VDC	450 mW
	LZG-(B) 3 VM	LZG-(B) 3H (M) (E)	LZG-(B) 3 (M) (E)	LZG-(B) 3 W (M)	3 VDC	20 Ω	1.95 VDC	0.15 VDC	450 mW
	LZG-(B) 5 VM	LZG-(B) 5H (M) (E)	LZG-(B) 5 (M) (E)	LZG-(B) 5 W (M)	5 VDC	56 Ω	3.25 VDC	0.25 VDC	450 mW
	LZG-(B) 6 VM	LZG-(B) 6H (M) (E)	LZG-(B) 6 (M) (E)	LZG-(B) 6 W (M)	6 VDC	80 Ω	3.9 VDC	0.3 VDC	450 mW
	LZG-(B) 9 VM	LZG-(B) 9H (M) (E)	LZG-(B) 9 (M) (E)	LZG-(B) 9 W (M)	9 VDC	180 Ω	5.85 VDC	0.45 VDC	450 mW
	LZG-(B) 12 VM	LZG-(B) 12H (M) (E)	LZG-(B) 12 (M) (E)	LZG-(B) 12 W (M)	12 VDC	320 Ω	7.8 VDC	0.6 VDC	450 mW
	LZG-(B) 18 VM	LZG-(B) 18H (M) (E)	LZG-(B) 18 (M) (E)	LZG-(B) 18 W (M)	18 VDC	720 Ω	11.7 VDC	0.9 VDC	450 mW
	LZG-(B) 24 VM	LZG-(B) 24H (M) (E)	LZG-(B) 24 (M) (E)	LZG-(B) 24 W (M)	24 VDC	1,280 Ω	15.6 VDC	1.2 VDC	450 mW
High Sensitivity Type	LZG-(B) 48 VM	LZG-(B) 48H (M) (E)	LZG-(B) 48 (M) (E)	LZG-(B) 48 W (M)	48 VDC	3,800 Ω	28.8 VDC	2.4 VDC	600 mW
	LZG-(B) 1.5H (M)S (E)	LZG-(B) 1.5 (M)S (E)	LZG-(B) 1.5 W (M) S		1.5 VDC	6.8 Ω	0.97 VDC	0.08 VDC	330 mW
	LZG-(B) 3H (M)S (E)	LZG-(B) 3 (M)S (E)	LZG-(B) 3 W (M) S		3 VDC	27 Ω	1.95 VDC	0.15 VDC	330 mW
	LZG-(B) 5H (M)S (E)	LZG-(B) 5 (M)S (E)	LZG-(B) 5 W (M) S		5 VDC	80 Ω	3.25 VDC	0.25 VDC	330 mW
	LZG-(B) 6H (M)S (E)	LZG-(B) 6 (M)S (E)	LZG-(B) 6 W (M) S		6 VDC	110 Ω	3.9 VDC	0.3 VDC	330 mW
	LZG-(B) 9H (M)S (E)	LZG-(B) 9 (M)S (E)	LZG-(B) 9 W (M) S		9 VDC	250 Ω	5.85 VDC	0.45 VDC	330 mW
	LZG-(B) 12H (M)S (E)	LZG-(B) 12 (M)S (E)	LZG-(B) 12 W (M) S		12 VDC	440 Ω	7.8 VDC	0.6 VDC	330 mW
	LZG-(B) 18H (M)S (E)	LZG-(B) 18 (M)S (E)	LZG-(B) 18 W (M) S		18 VDC	990 Ω	11.7 VDC	0.9 VDC	330 mW
	LZG-(B) 24H (M)S (E)	LZG-(B) 24 (M)S (E)	LZG-(B) 24 W (M) S		24 VDC	1,780 Ω	15.6 VDC	1.2 VDC	330 mW

Note: All values in the table are measured at 20 °C.


## CHARACTERISTIC AND REFERENCE DATA

Please see LZ relays.

## DIMENSIONS


### Dimensions

LZG-M type

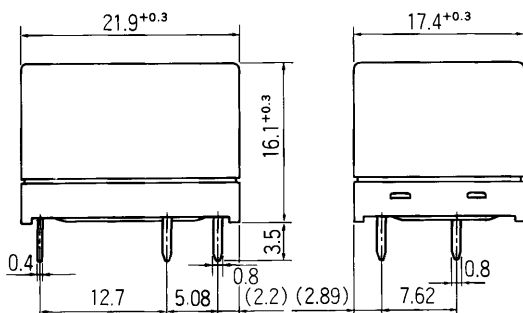


### Schematics

(BOTTOM VIEW)



### PC board mounting hole layout

(BOTTOM VIEW)

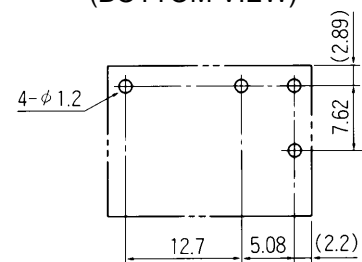


# LZG SERIES

## ■ DIMENSIONS


### ● Dimensions

LZG-M-K, LZG-M-C type (Plastic sealed type)

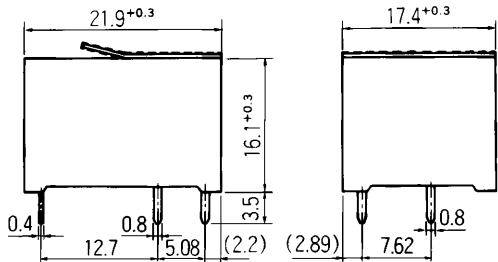


Dotted line : Seal tape (LZG-M-C Type)




### ● Schematics (BOTTOM VIEW)




### ● PC board mounting hole layout (BOTTOM VIEW)

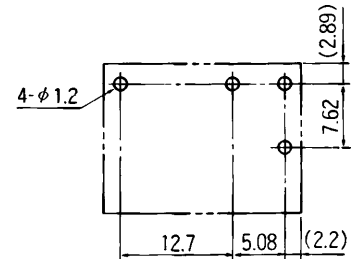



LZG type

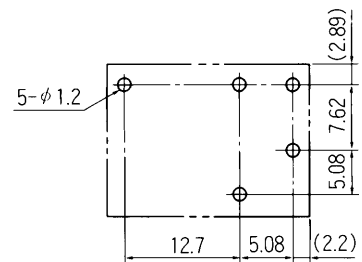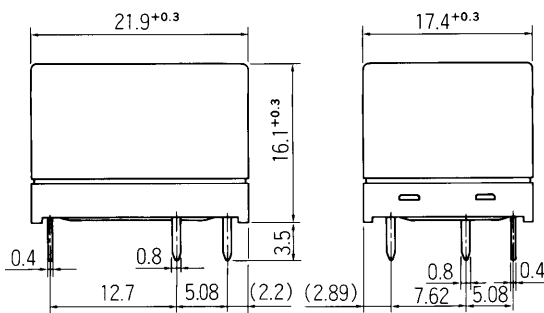

LZG-K, LZG-C type (Plastic sealed type)

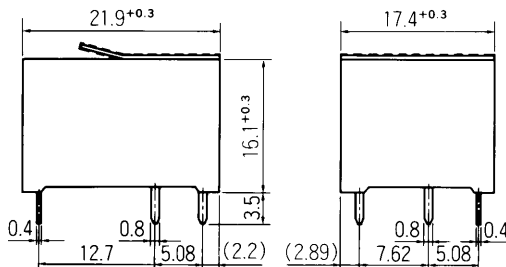

Dotted line : Seal tape (LZG-C type)

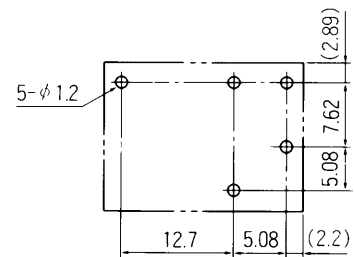

Unit: mm

**Fujitsu Takamisawa  
International  
Headquarter  
Offices**

[www.fujitsu.takamisawa.com](http://www.fujitsu.takamisawa.com)

#### Japan

Fujitsu Takamisawa Component Limited  
Global Marketing and Sales  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626

#### North and South America

Fujitsu Takamisawa America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970

#### Europe

Fujitsu Takamisawa Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950

#### Asia Pacific

Fujitsu Takamisawa Asia Pacific Pte. Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 375-8560  
Fax: (65) 273-3021